


- ✦ Our hydraulic presses are designed to give maximum pressure at minimum applied force.
- ✦ Mechanical structure are very strong and greatest breaking strength to ensure safety operation.
- ✦ As a precaution against over-press, all units are provided with pressure gauge and optional relief valve.

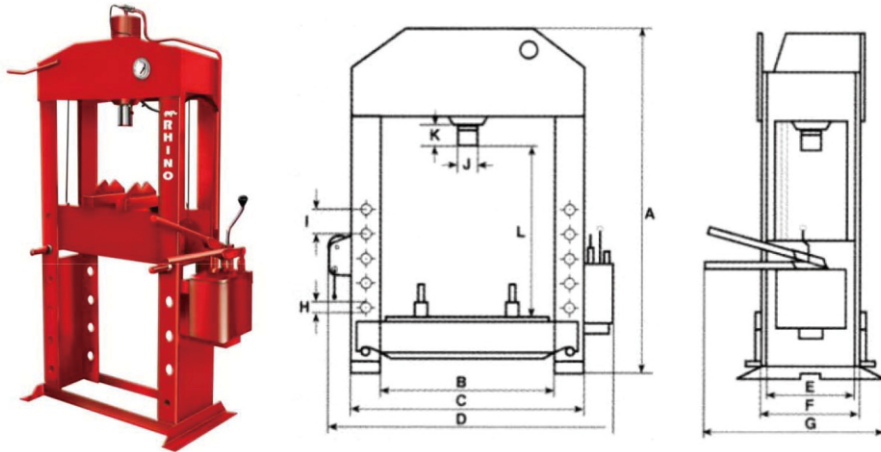

Model		RP-10T	RP-30T	RP-40T	RP-60T	RP-100T
Capacity (ton)		10	30	40	60	100
Overall Height (mm)	A	1180	1730	1810	1930	2070
Working Width (mm)	B	455	560	795	800	1150
Frame Width (mm)	C	550	760	1000	1080	1505
Overall Width (mm)	D	650	1000	1255	1295	1910
Working Width Of Side (mm)	E	100	200	230	305	455
Frame Width Of Side (mm)	F	200	280	310	390	510
Overall Width Of Side (mm)	G	430	685	770	915	1150
Frame Hole (mm)	H	25	32	32	40	52
Distance Between Frame Hole(mm)	I	126	140	133	133	133
Piston Rod (mm)	J	52	70	75	75	98
Ram Stroke (mm)	K	135	150	150	185	235
Working Height Ram To Table (mm)	L	585	905	830	830	835
Total Weight (kg)		75	250	420	665	1270